



enLighten

Area/Street Luminaire

MODERN
ARCHITECTURAL
DESIGN



Yindi

Robust, low glare architectural design

The Yindi is a versatile, elegant architectural luminaire perfect for the urban environment. This robust light features a wide range of power and lens options, making it suitable for most locations.

Make your public areas safer and more inviting. A brightly lit walkway, can reduce trips and resulting injuries. Architectural lighting can transform an urban nightscape into a vibrant community area.

With optimised lens technology the Yindi provides high levels of visibility whilst reducing glare. Perfect for pathways and open areas.

OPTIONS AND BENEFITS

- **Wide range** of power & lens options
- **Smooth housing** with no screws exposed
- **3000K/4000K** selectable
- **Tempered glass** protecting optic lens
- **No upward light spill**
- **IP66** - Ingress protection
- **IK08** - Impact rating
- **Expected life > 130,000hrs** from high quality, high powered LEDs
- **Easy to install**
- **Easy to maintain** with driver in the pole
- **DALI-2** option available
- **5 year warranty**

APPLICATIONS



BIKE PATHS



CAMPUSES UNIVERSITIES



COUNCIL PARKS



HOSPITALS



INDUSTRIAL ESTATE



OUTDOOR CARPARKS



SCHOOLS

FEATURES



EASY INSTALL



INGRESS PROTECTION



IMPACT RATING



LOW MAINTENANCE



NO UPWARD LIGHT SPILL



SAFETY COMPLIANCE



VERTICAL MOUNT



YEAR WARRANTY




PRODUCT RANGE

Model #	Selectable Power (W)	Lumen Output (lm)	Dimensions (mm)	Weight (kg)
YPT60A-8CS-L7	18	2170	ø450x526mm	7.5
	30	3800		
	45	5900		
	60	8000		
YPT100A-8CS-L7	30	3800	ø450x526mm	8.2
	50	6100		
	75	8900		
	100	11780		

The above models are stocked. Other lens types are available on order. For L3 and L5 lens types, replace L7 with L3 or L5. DALI models only feature the CCT switch. Contact enLighten for DALI model numbers.

DIMENSIONS

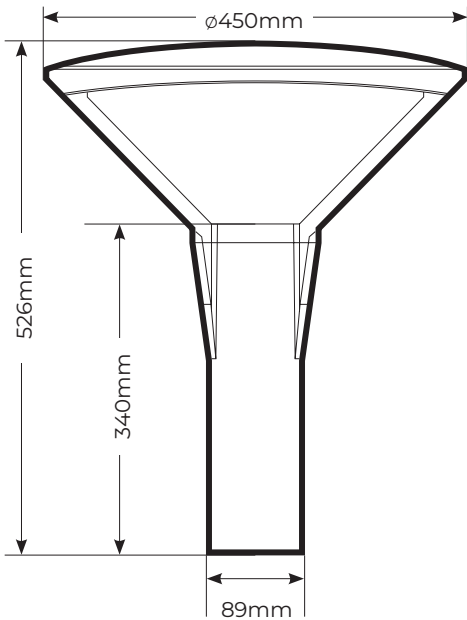

NOTE

The Yindi fits on 60mm and 76mm OD poles

TECHNICAL INFORMATION

Optical

Light source	Seoul Semiconductor
Lumen output	2,170 - 11,800 lumens
CRI	Ra>80
CCT	3000K/4000K (selectable)
Luminaire efficacy	> 120 lm/W

Electrical

Power consumption (W)	18W - 100W
Operating frequency	50/60Hz
Operating voltage range	100 - 277V AC
Power factor	> 0.9/240V AC at full load
Driver efficiency	> 90%

Environmental

IP rating	IP66
Impact rating	IK08
Weight	7.5 - 8.2kg
Ambient temperature range	-30°C to +50°C
Material Composition (body)	Black powder coated die-cast aluminium
Material Composition (lens)	Tempered glass and polycarbonate optical lens
Expected Lifespan	> 130,000 hours @ L70

Controls - Optional

DALI-2

Warranty*

5 years

Data subject to change without notice
* Refer to warranty policy

COMPLIANCE


The Yindi series meets or exceeds all relevant standards and regulatory requirements.

For a full compliance and testing list visit www.enlighten.com.au. IES files, warranty, installation and product guides are also available for download.


Sold nationally through major electrical wholesalers.




PHOTOMETRICS



L3 - Type III




L5 - Type IV High Peak



L7 - Double Asymmetric High Peak

POLE HEIGHT

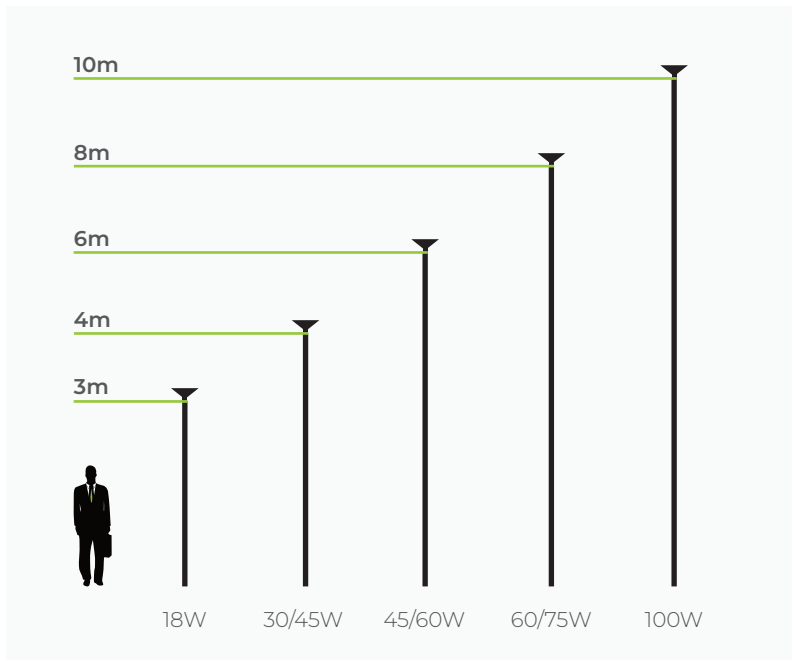

POLE MOUNT ADAPTOR

The fitting fits on a 76mm OD pole and the adaptor included in the box allows mounting on 60mm OD poles.

